


3V3A

BRAVA BATTERY

27M-580 12V92Ah



Dimensions (mm)

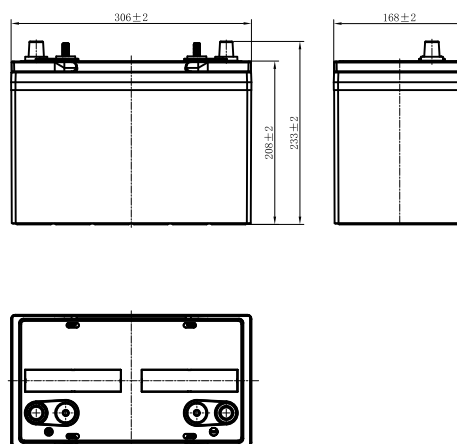

Physical Specification (mm)



Nominal Voltage		12V
Nominal Capacity(20HR)		92Ah
Dimension	Length	306±2mm(12.05inches)
	Width	168±2mm(6.61inches)
	Container Height	208±2mm(8.19inches)
	Total Height(with Terminal)	233±2mm(9.17inches)
Weight		Approx 27.0Kg(59.54lbs)
Standard Terminal		12
Cell layout		1
Hold-Down		B0
Cell plate qty		/
Case		Black-ABS Material
Cover		Black-ABS Material
Handle		Black-ABS Material

Electrical Specification

Rated Capacity	20 hour rate(4.6A)	92Ah
Reserve Capacity		175min
Cold Cranking Performance Amps@0°F(-18°C)		580A

Standard Terminal (mm)

Cell Layout


Terminal Type	12	
 POS NEG		 Figure (1)

Discharge Characteristics(-18°C,0°F)

27M-580(CCA-SAE)

CCA-SAE(@-18°C)with I=580A

Spec $U_{10S} \geq 7.5V$ $U_{30S} \geq 7.2V$

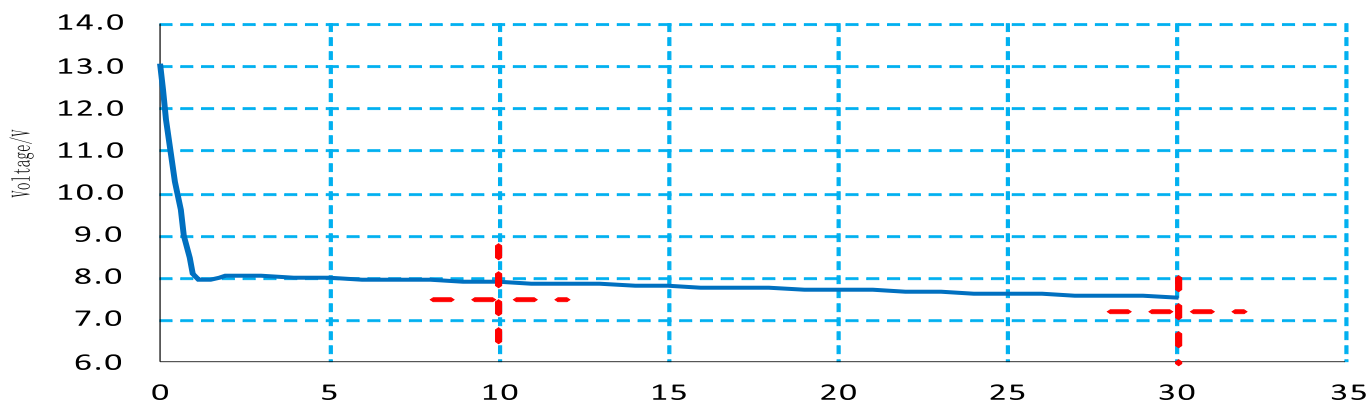

*Values are subject to variation of +/- 5% in normal manufacturing processes.

*Technical specifications and the product line above could be changed without prior notice.