


3V3A

BRAVA BATTERY

24M-550 12V79Ah



Dimensions (mm)

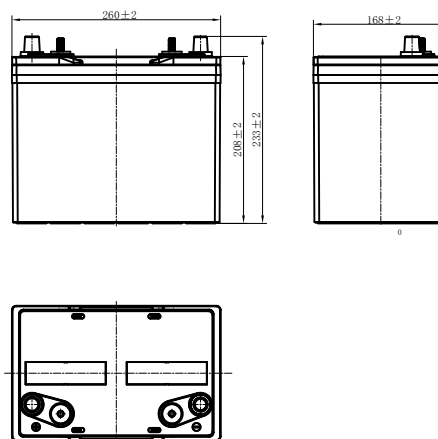

Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		79Ah
Dimension	Length	260±2mm(10.24inches)
	Width	168±2mm(6.61inches)
	Container Height	208±2mm(8.19inches)
	Total Height(with Terminal)	233±2mm(9.17inches)
Weight		Approx 23.0Kg(50.72lbs)
Standard Terminal		12
Cell layout		1
Hold-Down		B0
Cell plate qty		/
Case		Black-ABS Material
Cover		Black-ABS Material
Handle		Black-ABS Material

Electrical Specification

Rated Capacity	20 hour rate(3.95A)	79Ah
Reserve Capacity		150min
Cold Cranking Performance Amps@0°F(-18°C)		550A

Standard Terminal (mm)

Cell Layout


Terminal Type	12	Figure(1)
POS NEG		

Discharge Characteristics(-18°C,0°F)

24M-550(CCA- SAE)

CCA- SAE(@-18°C)with I=550A

Spec $U_{10S} \geq 7.5V$ $U_{30S} \geq 7.2V$

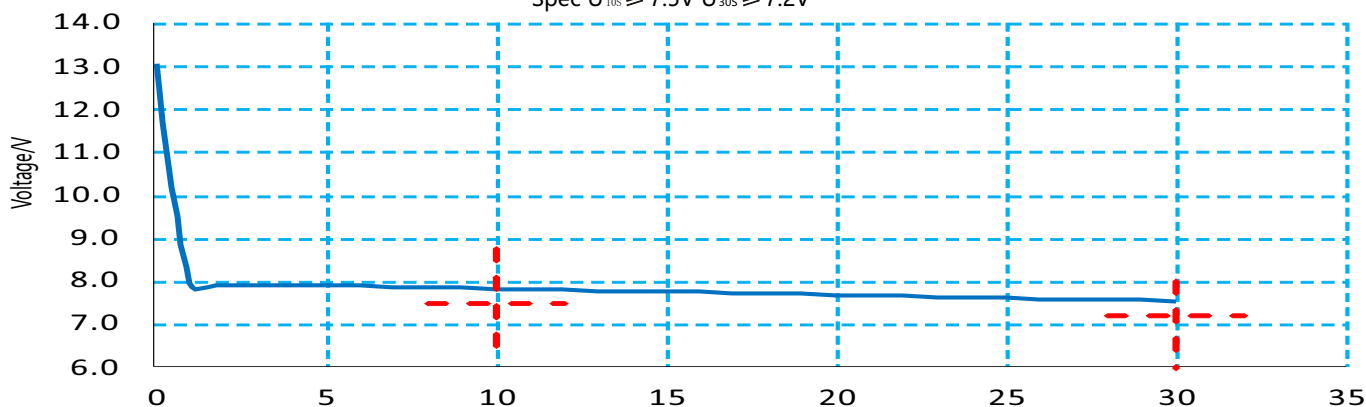

*Values are subject to variation of +/- 5% in normal manufacturing processes.

*Technical specifications and the product line above could be changed without prior notice.